



24 Vdc	90 ~ 305 Vac	0 ~ 1500 mA	36 W	85%	0.96	0.95	EUV-036S024ST <sup>(3)</sup>
36 Vdc	90 ~ 305 Vac	0 ~ 1000 mA	36 W	86%	0.96	0.95	EUV-036S036ST <sup>(4)</sup>
48 Vdc	90 ~ 305 Vac	0 ~ 750 mA	36 W	87%	0.96	0.95	EUV-036S048ST <sup>(5)</sup>

	-	-	0.75 MIU	UL8750; 277Vac/ 60Hz
	-	-	0.75 mA	IEC60598-1; 240Vac/ 60Hz
	-	-	0.6 A	
			0.3 A	

	-	-	60 A	
	-	-	0.2 A <sup>2</sup> s	


	-5%Vo	-	5%Vo	
Vo = 24 V	-	-	28V	
Vo = 36 V	-	-	40V	
Vo = 48 V	-	-	52V	

Vo = 24 V  
Vo = 36 V


Vo = 24 V Vo = 36 V Vo = 48 V	84% 85% 86%	85% 86% 87%	- - -	
	371,000 hours	-	-	
	-	111,700 Hours	-	
	-40 C	-	+90 C	
	-40 C	-	+70 C	
	-40 C	-	+85 C	
	-	520 g		

UL/CUL	UL8750, UL1012, UL1310 Class 2, CSA-C22.2 No. 107.1, CSA C22.2 NO. 223-M91 Class 2
CE	EN 61347-1, EN61347-2-13


EMS	
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

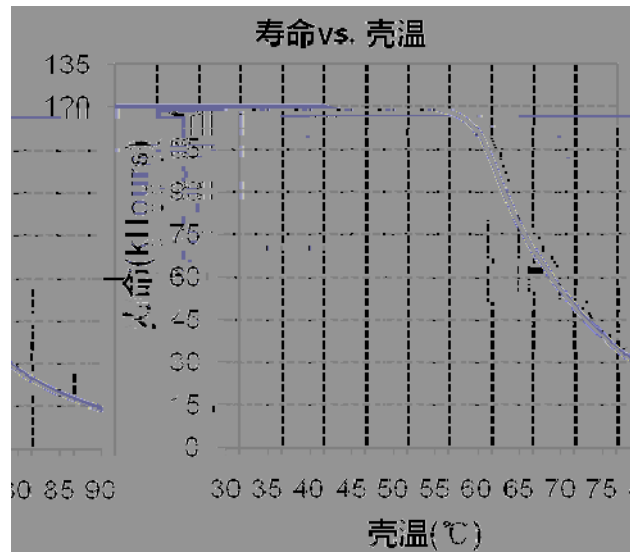


**EUV-036S024ST**  
效率 vs. 输出电流

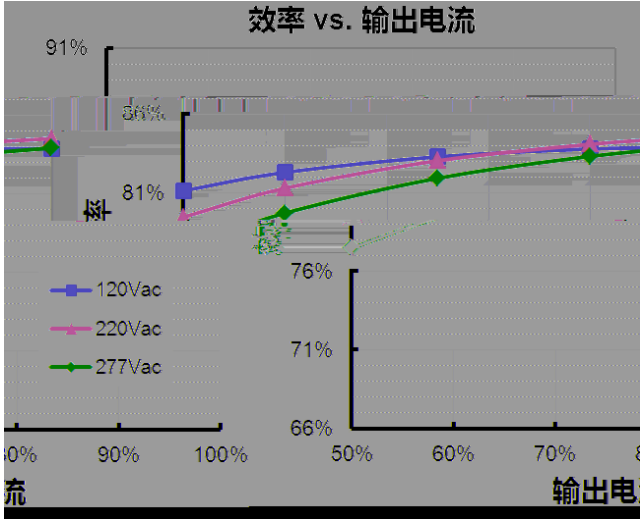


**EUV-036S036ST**  
效率 vs. 输出电流

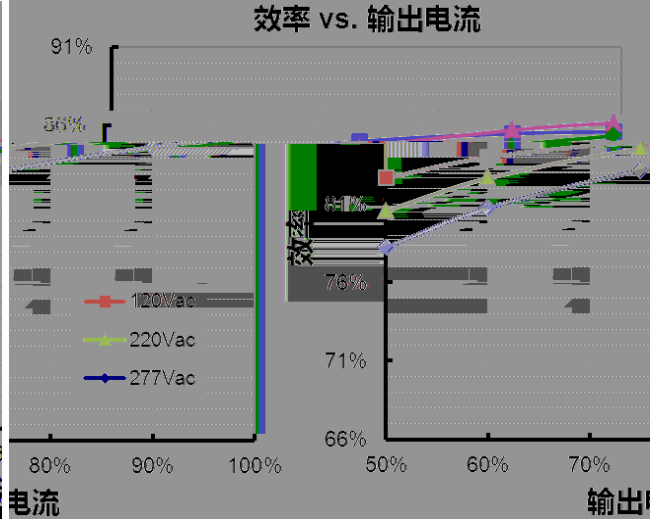


**EUV-036S048ST**  
效率 vs. 输出电流

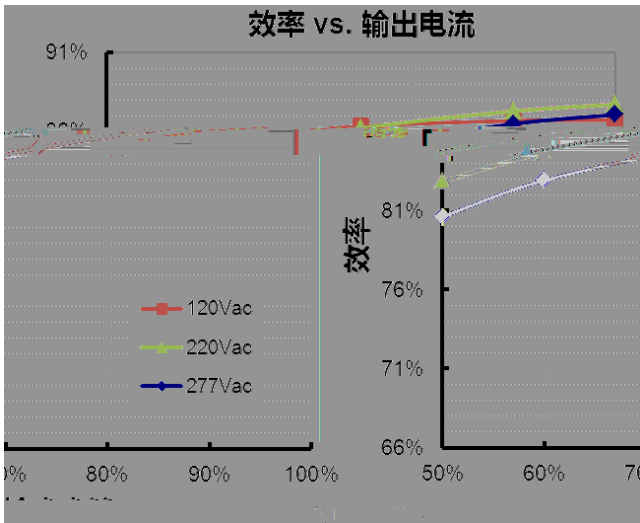

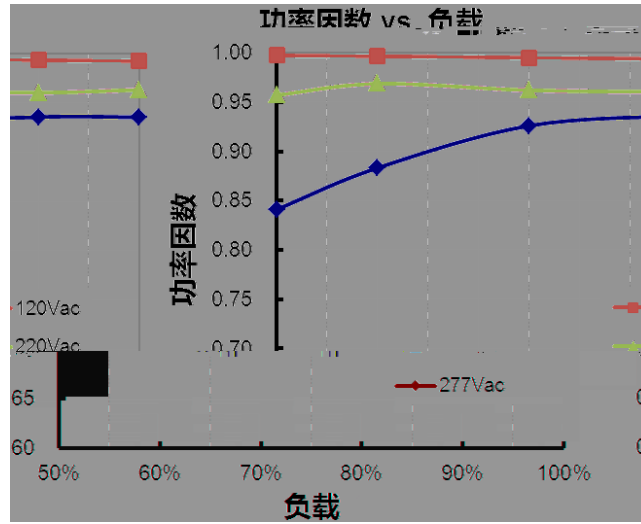

	1.1 lo	1.4 lo	1.70 lo	

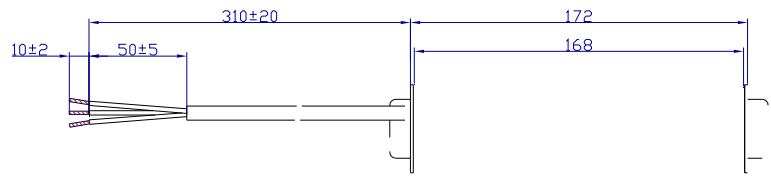

PROJ:

: ±1

2012-04-24	A			
2012-05-25	B			
2012-06-06	C			
2012-07-03	D			
2012-7-12	E			
2012-7-30	F			
2012-8-21	G			
2012-11-27	H		Min 50,000hrs	Typical 111,700hrs
2017-04-05	I			
		(L x W x H)	172 x 42.4 x 34.0	172 x 45.0 x 35.0
			480 g	520 g